


16" STANDING SEAM PANEL



- 16" coverage standard for 26 ga.
- 12", 16" & 18" coverage standard for 24 ga.
- 1" snaplock rib
- Minimum slope 3:12
- Requires solid decking
- 19 WXL stock colors, plus galvalume, 26 ga.
- 5 PVDF stock colors, 26 ga.
- 32 PVDF stock colors, plus galvalume, 24 ga.
- UL Class A Fire rating
- UL Class IV Impact rating

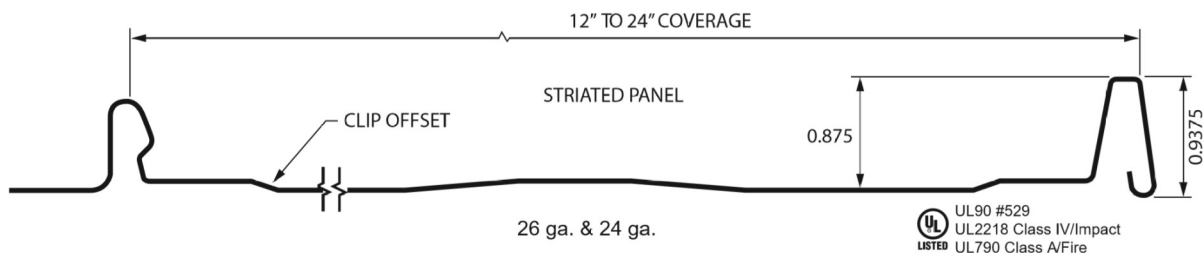

Standing Seam is an economical snap-together panel with a 1" standing seam for use over a solid deck. Panels are installed by using a pancake fastener in the panel's fastener flange. Available in 26 ga. and 24 ga. Minimum recommended slope is 3:12. Pan striations required for all 26 ga. panels.